



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, DC 20460

OFFICE OF CHEMICAL SAFETY
AND POLLUTION PREVENTION

October 3, 2018

Kevin Kutcel
Agent for,
c/o New Nautical Coatings, Inc.
KRK Consulting LLC
5807 Churchill Way
Medina, Ohio 44256

Subject: Notification per PRN 98-10 – To revise the proposed product labeling
Product Name: Sea Hawk Mission Bay Copper-Free Antifouling Coating
EPA Registration Number: 44891-16
Application Date: August 31, 2018
Decision Number: 544018

Dear Mr. Kutcel:

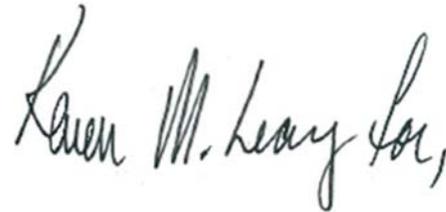
The Agency is in receipt of your Application for Pesticide Notification under Pesticide Registration Notice (PRN) 98-10 for the above referenced product. The Antimicrobials Division (AD) has conducted a review of this request for its applicability under PRN 98-10 and finds that the action requested falls within the scope of PRN 98-10.

The label submitted with the application has been stamped “Notification” and will be placed in our records.

Should you wish to add/retain a reference to the company’s website on your label, then please be aware that the website becomes labeling under the Federal Insecticide Fungicide and Rodenticide Act and is subject to review by the Agency. If the website is false or misleading, the product would be misbranded and unlawful to sell or distribute under FIFRA section 12(a)(1)(E). 40 CFR 156.10(a)(5) list examples of statements EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product’s label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the Agency find or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from the EPA approved registration, the website will be referred to the EPA’s Office of Enforcement and Compliance.

If you have any questions, you may contact Karen M. Leavy at (703)-308-6237 or via email at Leavy.Karen@epa.gov.

Sincerely,

A handwritten signature in black ink that reads "Karen M. Leavy, Esq.". The signature is written in a cursive style with a large initial 'K' and a long, sweeping underline.

Eric Miederhoff
Product Manager 31
Regulatory Management Branch I
Antimicrobials Division (7510P)
Office of Pesticide Programs

NOTIFICATION

44891-16

The applicant has certified that no changes, other than those reported to the Agency have been made to the labeling. The Agency acknowledges this notification by letter dated:

10/03/2018

Notes to reviewer are bracketed []
Statements in parenthesis are optional or alternative text ()

Sea Hawk Mission Bay Copper-Free Antifouling Coating
[Brand Names]

[Alternative Brand Names]
Mission Bay

Active Ingredients:

ACTIVE INGREDIENT:
Zinc Omadine 3.80%
OTHER INGREDIENTS: 96.20%
TOTAL 100.00%
*Contains petroleum distillates, xylene
or xylene range aromatic solvents.

KEEP OUT OF REACH OF CHILDREN
DANGER

SEE BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS AND FIRST AID
STATEMENT

(LIMITED WARRANTY: The manufacturer warrants all material sold by it against defects in the material. The manufacturer's liability under the sale and warranty of this material shall in any case be limited to replacement of material only. The manufacturer makes no other warranty of this product, expressed or implied.)

[OPTIONAL MARKETING STATEMENTS:]

(Sea Hawk)
(Yacht Finishes)
(Premium Quality)
(Antifouling Coating)
(California Compliant)
(Tough on Barnacles – ~~Easy On The Air~~)
(Hand Crafted in America!SM)
(Self Polishing)
(Antifouling Paint)
(Ablative)
(Antifouling Bottom Paint)
(Copper-Free)
(Copper-Free Antifouling Coating)
(Premium Yacht Finishes)

(Antifouling Paint)
(Multi-season Protection)
(4005 Black)
(4002 Blue)
(4030 Dark Blue)
(4001 Red)
(4003 Green)
(4010 White)

[Optional Graphics]



- PREMIUM QUALITY

Mission Bay
Copper-Free Antifouling Coating





[ABOVE BAR CODE WILL APPEAR ON EACH CAN AND THE NUMBERS PROVIDED THE ABOVE WILL CORRESPOND WITH THE BAR CODE ISSUED FOR THAT PRODUCT.]



[Above will be used with contents and manufacturer depending on the size]

[Net Contents:] (5-gallon pail 18.927), (Gallon 3.785 Liters), (Quart 0.9463 Liters)

(Batch Code) [to appear on front or back panel of the label or immediate container depending on the container type/size]

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

GENERAL DESCRIPTION

Ablative, self-polishing antifoulant. This product is designed to control barnacles, algae and other marine foulings in salt or fresh water. This product is designed for use on the surfaces of hulls on ships, boats, barges, yachts, or running gear.

Shake vigorously for several minutes with a mechanical paint shaker before use. Due to the settlement in the product, if this product is not properly shaken it will become ineffective.

SHAKE VIGOROUSLY FOR A MINIMUM OF 10 MINUTES BEFORE APPLICATION

PRODUCT INFORMATION

Finish/Sheen: Semi-Gloss
Converter: One Pack
Volume Solids: 45% ± 2%
Mix Ratio: One Pack
Shipping Weight: 12-13 Lbs./Gal.
Flash Point: 100°F/38°C
Film Thickness: 6 mils wet equals 2.7 dry per coat
Recommended Coats: 3
Theoretical Coverage: 267 Sq. Ft./Gal. @ recommended film thickness

APPLICATION DETAILS

Sweat-In Time: Not Applicable
Thinner: 2033-2035
Cleaner: Sea Hawk Xylene 7130

Overcoating Interval Drying Time (Hrs)				
Substrate Temp.	Touch	Min.	Max.	Launch
73°F (23°C)	2 Hr	1 Hr	N/A	12 Hrs
95°F (35°C)	1 Hr	1 Hr	N/A	12 Hrs

Consult with your Sea Hawk representative for the system best suited for surfaces to be protected.

REGULATORY DATA

VOC: 298 Grams/Liter

LIMITATIONS: Apply in good weather when air and surface temperature are above 50°F (10°C). Surface temperature must be at least 5°F (1°C) above dew point. For optimum application properties, bring material to 70-80°F (21-27°C) temperature range prior to mixing and application. Unmixed material (in closed containers) should be maintained in protected storage between 40 and 100° F (4-38°C). Prolonged atmospheric exposure of this product may detract from performance. Technical and application data herein is for the purpose of establishing a general guideline for the coating application procedures. See published data sheets for more specific application data. As application, environment and design factors can vary significantly, due care should be exercised in the selection, verification of performance and use of the coating.

SURFACE PREPARATION: Paint only clean, dry surfaces. Remove all grease, oil, wax, or other foreign material by solvent or detergent washing. (SSPC-SPI)

APPLICATION: (Apply three coats) This product can be applied by brush, roller or spray.

THINNING: We do not recommend thinning. If necessary thin no more than 10% by volume with 2033 or 2035.

CLEANUP: Clean all equipment immediately after using with Sea Hawk Xylene 7130.

SAFETY: Read and observe all precautionary statements on this label.

STORAGE AND DISPOSAL

Do not contaminate food, feed or water by storage or disposal.

STORAGE: Do not store near open heat or flame. Store in well ventilated area.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal law. If these wastes cannot be disposed of by the use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Non-refillable container. Do not reuse or refill this container. (Prior to container disposal, allow any remaining paint residue in the container to air dry. Dispose of the container in accordance with Federal, State or local disposal regulations.) Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS KEEP OUT OF REACH OF CHILDREN

DANGER. CORROSIVE: Causes irreversible eye damage. Harmful if swallowed or absorbed through the skin. May be fatal if inhaled. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Do not get in eyes or on skin or on clothing. Do not breathe vapor or spray mist. Wash thoroughly after handling with soap and water, and before eating, drinking or using tobacco. Remove contaminated clothing and wash clothing before reuse. When mixing and loading, or cleaning equipment wear a chemical resistant apron.

RESIDENTIAL PPE: Residential (non-commercial) users are advised to Wear chemical resistant gloves, protective eyewear (goggles, safety glasses or face shield), long-sleeved shirt and long pants, socks, and shoes. While removing existing paint by sanding or blasting, or applying new paint by brush, or roller, (or spray,) it is advised to wear a (half face NIOSH approved respirator (TC-84A) with organic vapor cartridges and R or P combination filters; **OR** a full face NIOSH approved respirator (TC-84A) with organic vapor cartridges and any R or P combination filters; a NIOSH approved gas mask (TC-14) with Organic Vapor Cannister and HE Filter; **OR** a NIOSH approved powered air purifying respirator (TC-23C) with an organic vapor cannister and HE filter.) respirator with an organic vapor removing cartridge with a pre filter approved for pesticides. (MSHA/NIOSH approval number prefix TC-23C), or a canister approved for pesticides (MSHA/NIOSH approval number TC-14G), or a NIOSH approved full face respirator with an organic vapor removing cartridge with a P-100 pre filter.

COMMERCIAL PPE: Users must wear a disposable coverall with hood, chemical resistant gloves, protective eyewear (goggles, safety glasses or face shield), long sleeved shirt and long pants, socks, and chemical resistant footwear. While removing existing paint by sanding or blasting, or applying new paint, user must wear a respirator with an organic vapor removing cartridge with a pre filter approved for pesticides (MSHA/NIOSH approval number prefix TC-23C), or a canister approved for pesticides (MSHA/NIOSH approval number TC-14G), or a NIOSH approved full face respirator with an organic vapor removing cartridge with a P-100 pre filter.

ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposing of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

PHYSICAL AND CHEMICAL HAZARDS

Combustible. Do not use or store near open flame.

FIRST AID	
IF INHALED:	<ul style="list-style-type: none">• Move person to fresh air.• If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible.• Call a poison control center or doctor for further treatment advice.
IF ON SKIN OR CLOTHING:	<ul style="list-style-type: none">• Take off contaminated clothing.• Rinse skin immediately with plenty of water for 15-20 minutes.• Call a poison control center or doctor for treatment advice.
IF IN EYES:	<ul style="list-style-type: none">• Hold eye open and rinse slowly and gently with water for 15-20 minutes.• Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.• Call a poison control center or doctor for treatment advice.
IF SWALLOWED:	<ul style="list-style-type: none">• Call poison control center or doctor immediately for treatment advice.• Do not induce vomiting unless told to do so by a poison control center or doctor.• Do not give any liquid to the person.• Do not give anything by mouth to an unconscious person.
(Have the product container or label with you when calling a poison control center or doctor or going for treatment.)	
For Hazardous Materials [or Dangerous Goods] Incident Spill, Leak, Fire, Exposure, or Accident Call CHEMTREC Day or Night. Within USA and Canada 1-800-424-9300. Outside USA and Canada +1-703-741-5970 CHEMTREC. Account #15570.	
For Non Emergencies call New Nautical Coatings Inc., Within the USA and Canada 1-800-528-0997, Outside USA and Canada +1-727-523-8053.	
NOTE TO PHYSICIAN: Probably mucosal damage may contraindicate the use of gastric lavage.	

E.P.A. Registration No. 44891-16 / E.P.A. Establishment No. 44891-FL-1